




YSKC 超硬キーシードカッター

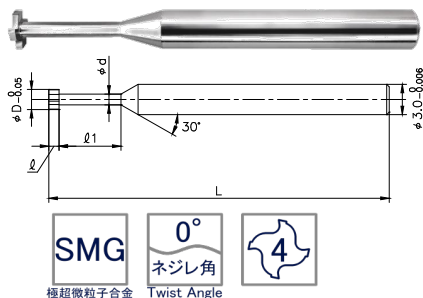

・被削材：S50C



・被削材：アクリル



・使用工具：YSKC-42010 (φ2.0×刃厚1.0)

・バリが少なく、加工面も良好

型番	ツールNo.	外径 D	刃厚 l	首径 d	首長 l1	全長 L
YSKC-40501	KY23420	0.5	0.1	0.27	1	50
YSKC-40502	KY23421		0.2	0.27	1	50
YSKC-40503	KY23422		0.3	0.27	1	50
YSKC-40504	KY23423		0.4	0.27	1	50
YSKC-40505	KY23424		0.5	0.27	1	50
YSKC-40506	KY23425		0.6	0.27	1	50
YSKC-40507	KY23426		0.7	0.27	1	50
YSKC-40508	KY23427		0.8	0.27	1	50
YSKC-40509	KY23428		0.9	0.27	1	50
YSKC-40510	KY23429		1	0.27	1	50
YSKC-40601	KY23430	0.6	0.1	0.35	1.2	50
YSKC-40602	KY23431		0.2	0.35	1.2	50
YSKC-40603	KY23432		0.3	0.35	1.2	50
YSKC-40604	KY23433		0.4	0.35	1.2	50
YSKC-40605	KY23434		0.5	0.35	1.2	50
YSKC-40606	KY23435		0.6	0.35	1.2	50
YSKC-40607	KY23436		0.7	0.35	1.2	50
YSKC-40608	KY23437		0.8	0.35	1.2	50
YSKC-40609	KY23438		0.9	0.35	1.2	50
YSKC-40610	KY23439		1	0.35	1.2	50
YSKC-40701	KY23440	0.7	0.1	0.38	1.4	50
YSKC-40702	KY23441		0.2	0.38	1.4	50
YSKC-40703	KY23442		0.3	0.38	1.4	50
YSKC-40704	KY23443		0.4	0.38	1.4	50
YSKC-40705	KY23444		0.5	0.38	1.4	50
YSKC-40706	KY23445		0.6	0.38	1.4	50
YSKC-40707	KY23446		0.7	0.38	1.4	50
YSKC-40708	KY23447		0.8	0.38	1.4	50
YSKC-40709	KY23448		0.9	0.38	1.4	50
YSKC-40710	KY23449		1	0.38	1.4	50
YSKC-40801	KY23450	0.8	0.1	0.45	1.6	50
YSKC-40802	KY23451		0.2	0.45	1.6	50
YSKC-40803	KY23452		0.3	0.45	1.6	50
YSKC-40804	KY23453		0.4	0.45	1.6	50
YSKC-40805	KY23454		0.5	0.45	1.6	50
YSKC-40806	KY23455		0.6	0.45	1.6	50
YSKC-40807	KY23456		0.7	0.45	1.6	50
YSKC-40808	KY23457		0.8	0.45	1.6	50
YSKC-40809	KY23458		0.9	0.45	1.6	50
YSKC-40810	KY23459		1	0.45	1.6	50
YSKC-40901	KY23460	0.9	0.1	0.5	1.8	50
YSKC-40902	KY23461		0.2	0.5	1.8	50
YSKC-40903	KY23462		0.3	0.5	1.8	50
YSKC-40904	KY23463		0.4	0.5	1.8	50
YSKC-40905	KY23464		0.5	0.5	1.8	50
YSKC-40906	KY23465		0.6	0.5	1.8	50
YSKC-40907	KY23466		0.7	0.5	1.8	50
YSKC-40908	KY23467		0.8	0.5	1.8	50
YSKC-40909	KY23468		0.9	0.5	1.8	50
YSKC-40910	KY23469		1	0.5	1.8	50

型番	ツールNo.	外径 D	刃厚 ℓ	首径 d	首長 ℓ1	全長 L
YSKC-41001	KY23470	1	0.1	0.55	2	50
YSKC-41002	KY23471		0.2	0.55	2	50
YSKC-41003	KY23472		0.3	0.55	2	50
YSKC-41004	KY23473		0.4	0.55	2	50
YSKC-41005	KY23474		0.5	0.55	2	50
YSKC-41006	KY23475		0.6	0.55	2	50
YSKC-41007	KY23476		0.7	0.55	2	50
YSKC-41008	KY23477		0.8	0.55	2	50
YSKC-41009	KY23478		0.9	0.55	2	50
YSKC-41010	KY23479		1	0.55	2	50
YSKC-41201	KY23480	1.2	0.1	0.65	2.4	50
YSKC-41202	KY23481		0.2	0.65	2.4	50
YSKC-41203	KY23482		0.3	0.65	2.4	50
YSKC-41204	KY23483		0.4	0.65	2.4	50
YSKC-41205	KY23484		0.5	0.65	2.4	50
YSKC-41206	KY23485		0.6	0.65	2.4	50
YSKC-41207	KY23486		0.7	0.65	2.4	50
YSKC-41208	KY23487		0.8	0.65	2.4	50
YSKC-41209	KY23488		0.9	0.65	2.4	50
YSKC-41210	KY23489		1	0.65	2.4	50
YSKC-41501	KY23490	1.5	0.1	0.8	3	50
YSKC-41502	KY23491		0.2	0.8	3	50
YSKC-41503	KY23492		0.3	0.8	3	50
YSKC-41504	KY23493		0.4	0.8	3	50
YSKC-41505	KY23494		0.5	0.8	3	50
YSKC-41506	KY23495		0.6	0.8	3	50
YSKC-41507	KY23496		0.7	0.8	3	50
YSKC-41508	KY23497		0.8	0.8	3	50
YSKC-41509	KY23498		0.9	0.8	3	50
YSKC-41510	KY23499		1	0.8	3	50
YSKC-42001	KY23500	2	0.1	1	4	50
YSKC-42002	KY23501		0.2	1	4	50
YSKC-42003	KY23502		0.3	1	4	50
YSKC-42004	KY23503		0.4	1	4	50
YSKC-42005	KY23504		0.5	1	4	50
YSKC-42006	KY23505		0.6	1	4	50
YSKC-42007	KY23506		0.7	1	4	50
YSKC-42008	KY23507		0.8	1	4	50
YSKC-42009	KY23508		0.9	1	4	50
YSKC-42010	KY23509		1	1	4	50

■切削条件

被削材	炭素鋼・一般構造用鋼 S55C・SS材		合金鋼・工具鋼 SCM・SKT・SKS・SKD		鋳鉄 FC・FCD		アルミニウム合金 ADC・AC		樹脂	
切削速度	20m/min		20m/min		20m/min		40m/min		45m/min	
加工深さ	0.1D		0.1D		0.1D		0.25D		0.25D	
外径 mm	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min
0.5	12,800	240	12,700	142	12,700	142	20,000	450	20,000	525
0.6	10,600	200	10,600	120	10,600	120	20,000	450	20,000	525
0.7	9,100	170	9,100	100	9,100	100	18,000	400	20,000	525
0.8	7,960	150	7,900	88	7,900	88	15,000	330	18,000	470
0.9	7,100	130	7,100	80	7,100	80	14,000	310	16,000	420
1	6,300	155	6,300	95	6,300	95	12,000	360	14,000	490
2	3,180	120	3,100	70	3,100	70	6,300	280	7,200	380

協和精工株式会社

www.kyowaseiko.co.jp

秋田県雄勝郡羽後町林崎字三ツ盛 34-1

TEL:0183-62-4566 FAX:0183-62-2030