


Coating

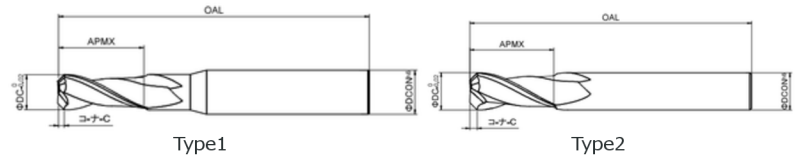

ワークの入隅部に正確なC面を直接削り出すことができる専用設計のエンドミル。長寿命かつ安定した高精度なC面加工を実現します。

MG Substrate	TiAlN Coating	2枚刃 Flutes	ねじれ30° Helix	0 -0.02 DC Tol.	h6 Shank Tol.
-----------------	------------------	---------------	-----------------	-----------------------	------------------

ツールNo. ToolNo.	刃径 DC	コーナーC CHW	刃長 APMX	全長 OAL	シャンク径 DCON	形状 Type
YT25081	1	C0.2	2.5	40	4	1
YT25082	2	C0.5	5	40	4	1
YT25083	3	C0.5	7.5	45	6	1
YT25084	3	C1	7.5	45	6	1
YT25085	4	C0.5	10	45	6	1
YT25086	4	C1	10	45	6	1
YT25087	4	C1.5	10	45	6	1
YT25088	5	C0.5	12.5	50	6	1
YT25089	5	C1	12.5	50	6	1
YT25090	5	C1.5	12.5	50	6	1
YT25091	6	C0.5	15	50	6	2
YT25092	6	C1	15	50	6	2
YT25093	6	C1.5	15	50	6	2
YT25094	6	C2	15	50	6	2
YT25095	8	C0.5	20	60	8	2
YT25096	8	C1	20	60	8	2
YT25097	8	C1.5	20	60	8	2
YT25098	8	C2	20	60	8	2
YT25099	8	C3	20	60	8	2
YT25100	10	C1	25	70	10	2
YT25101	10	C1.5	25	70	10	2
YT25102	10	C2	25	70	10	2
YT25103	10	C3	25	70	10	2
YT25104	12	C1	30	75	12	2
YT25105	12	C2	30	75	12	2
YT25106	12	C3	30	75	12	2

(単位 : mm)

被削材対応表 Material Compatibility Table

炭素鋼 Carbon Steel	合金鋼 Alloy Steel	プリハードン鋼 Prehardened Steel	鋳鉄 Cast Iron	ステンレス鋼 Stainless Steel	銅合金 Copper Alloy	アルミニウム合金 Aluminum Alloy
◎	◎	◎	◎	○	○	○