


YSEDLL 超硬2枚刃ロング刃エンドミル

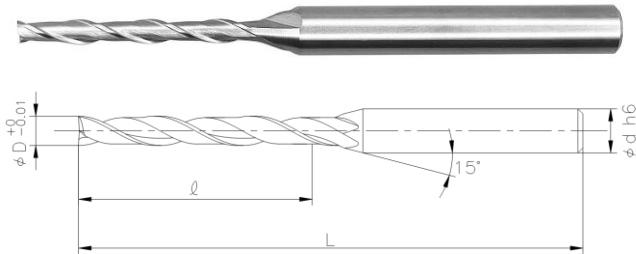

型番	ツールNo.	刃径 D	刃長 ℓ	柄径 d	全長 L
YSEDLL-30150	KY23665	3	15	6	60
YSEDLL-30200	KY23666		20	6	60
YSEDLL-30250	KY23667		25	6	70
YSEDLL-30300	KY23668		30	6	70
YSEDLL-40200	KY23669	4	20	6	70
YSEDLL-40250	KY23670		25	6	70
YSEDLL-40300	KY23671		30	6	70
YSEDLL-40350	KY23672		35	6	80
YSEDLL-40400	KY23673	5	40	6	80
YSEDLL-50300	KY23674		30	6	70
YSEDLL-50350	KY23675		35	6	80
YSEDLL-50400	KY23676		40	6	80
YSEDLL-50450	KY23677	6	45	6	90
YSEDLL-50500	KY23678		50	6	90
YSEDLL-60300	KY23679		30	6	80
YSEDLL-60350	KY23680		35	6	80
YSEDLL-60400	KY23681	6	40	6	80
YSEDLL-60450	KY23682		45	6	90
YSEDLL-60500	KY23683		50	6	90
YSEDLL-60600	KY23684		60	6	100

■切削条件

被削材	炭素鋼・一般構造用鋼 S55C・SS材		合金鋼・工具鋼 SCM・SKT・SKS・SKD		プリハードン鋼 HPM-1・NAK55・SKT		鋳鉄 FC・FCD	
	刃径 mm	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹	送り速度 mm/min	回転数 min ⁻¹
3	2,500	55	2,500	55	1,900	40	2,500	60
4	1,750	55	1,550	55	1,250	40	1,950	80
5	1,400	55	1,250	55	1,000	40	1,550	80
6	1,100	55	1,050	55	845	40	1,300	80

協和精工株式会社

www.kyowaseiko.co.jp

秋田県雄勝郡羽後町林崎字三ツ盛 34-1

TEL:0183-62-4566 FAX:0183-62-2030